

# WEST BENGAL MEDICAL SERVICES CORPORATION LTD.

(Wholly Owned by the Government of West Bengal)

CIN: U85110WB2008SGC126373

Regd. Off. : Swasthya Sathi, GN-29, Sector-V, Salt Lake, Kolkata-700091

Telephone: (033) 40340300 | Fax: (033) 40340400

E-mail: info@wbmsc.gov.in | Website: www.wbmsc.gov.in

Memo No.: HFW-41012(23)/1/2018-WBMSCL SEC-Dept. of H&FW/AAES-815/4174

Date: 12/11/2018

## ORDER

Administrative Approval & Expenditure Sanction is hereby accorded for the scheme 'Construction of a shed/roof truss at the roof of SNCU for drying the washed lien of SNCU at Bishnupur District Hospital of Bishnupur Health District under Bankura' at an estimated cost of Rs. 8,20,827.00 (Rupees Eight Lakh Twenty Thousand Eight Hundred Twenty Seven) only approved vide AAFS no. HFW-27011/451/2018-NHM SEC Dept of H&FW/SNCU\_Bishnupur/Const/5536 Dated 05/11/2018 under National Health Mission. The details are as follows:

Sl. No.	Particulars	Amount (Rs.)
1	Construction of a shed/roof truss at the roof of SNCU for drying the washed lien of SNCU at Bishnupur District Hospital of Bishnupur Health District under Bankura	7,08,097.00
2	GST @12% on SL No 1	84,972.00
3	Cost of Civil works excluding Labour Welfare Cess (SL No 1+ 2)	7,93,069.00
4	Labour Cess @ 1% on SL No 3	7,931.00
5	Contingency @ 2.5% on SL No 3	19,827.00
<b>Total:</b>		<b>8,20,827.00</b>

The work will be executed by the Executive Engineer, PWD, Bishnupur Division & Ex-Officio Executive Engineer, West Bengal Medical Services Corporation Limited as per norms stated in the order of the Health & Family Welfare Dept., M.S. Branch, vide no. HF/O/MS/384/W-39-12 dt. 01.06.2012 read with Notification No. 86-W(C)-1M-106/11 dt. 06.02.2012 and Memorandum no 37-W(C)-1M-106/11 dated 17.01.2012 of Public Works Department, Government of West Bengal.

Managing Director

Memo No.: HFW-41012(23)/1/2018-WBMSCL SEC-Dept. of H&FW/AAES-815/4174/1(9) Date: 12/11/2018

Copy forwarded for information and necessary action to:

1. Programme Officer, NHM & Deputy Secretary, Govt of West Bengal
2. CMOH, Bankura
3. Superintendent, Bishnupur District Hospital
4. Superintending Engineer, PWD, Western Circle-II & Ex-Officio Superintending Engineer, West Bengal Medical Services Corporation Limited
5. Manager (Accounts), West Bengal Medical Services Corporation Limited
6. Executive Engineer, PWD, Bishnupur Division & Ex-Officio Executive Engineer, West Bengal Medical Services Corporation Limited
7. Consultant Project Engineer (Civil), West Bengal Medical Services Corporation Limited
8. Sr P.S to Mission Director, NHM & Secretary, H&FW Dept
9. Office Copy

Managing Director

Tridib  
83  
5/11/18

GOVERNMENT OF WEST BENGAL  
HEALTH & FAMILY WELFARE DEPARTMENT  
NATIONAL HEALTH MISSION (NHM)  
4th FLOOR, SWASTHYA SATHI BUILDING,  
SWASTHYA BHAWAN PREMISES, SECTOR -V  
SALT LAKE, BIDHANNAGAR, KOLKATA - 700 091.

MA  
E-397508

033 - 2333 - 0238, 033 - 2357 - 7930,

Email ID: ponhwmwl@gmail.com; website: www.wbhealth.gov.in

No: HFW-27011/451/2018-NHM SEC-Dept. of H&FW/SNCU\_Bishnupur/Const./5536 Dated: 05/11/2018.

ORDER

Administrative approval and financial sanction is hereby accorded for the scheme 'Construction of a shed/roof truss at the roof of SNCU for drying the washed lien of SNCU at Bishnupur District Hospital of Bishnupur Health District under Bankura' at an estimated cost of Rs. 8,38,432.00 (Rupees Eight Lakh Thirty Eight Thousand Four Hundred & Thirty Two) only.

The details are as follows:


Sl. No.	Name of the Scheme	Estimated Amount (Rs.)	4% administrative charges +GST (In Rs.)	Total Sanctioned Amount (Rs.)
1	Construction of Shed/Roof Truss over SNCU	8,00,999.00	37,433.00	8,38,432.00
	<b>TOTAL</b>	<b>8,00,999.00</b>	<b>37,433.00</b>	<b>8,38,432.00</b>

- The abovementioned sanctioned amount is including an amount of Rs. 37,433.00 as 4% administrative charges payable to West Bengal Medical Service Corporation Limited including GST.
- The above work will be executed by the Executive Engineer, PWD, Bishnupur Division & e.o. Executive Engineer, West Bengal Medical Service Corporation Limited.
- Fund will be released after submission of requisition of fund by West Bengal Medical Service Corporation Limited.
- Utilisation Certificate for the above expenditure after release of fund will be submitted to this end in due course.
- Senior Accounts Officer, National Health Mission will be the drawing and disbursing officer in this respect after submission of the requisition of fund.
- The charge will be debitible from the NHM flexi-pool 2018-2019 under Head of Accounts "Maintenance at SNCU" [Tally A/C Head -B.04.01.05.04]
- The work will be completed within 3 (Three) months from the date of issuance of orders in this regard.
- Onsite visit will be conducted by the State Team for inspection of the quality of work.
- No other work will be allowed other than the approved scheme.
- Escalation of price for the said scheme will not be approved in any circumstances.
- This is issued with the approval of the Mission Director, National Health Mission & Secretary, Department of Health & Family Welfare, Govt. of West Bengal.
- All concerned are being informed.

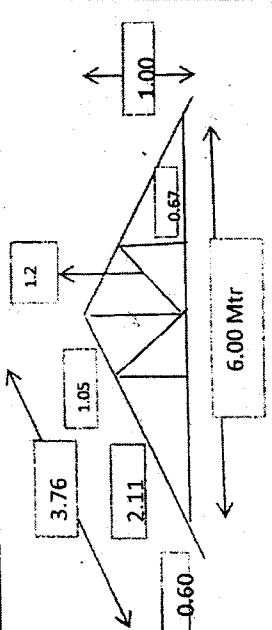
*Shubla* 5/11/18  
Programme Officer, NHM  
& Deputy Secretary to the  
Government of West Bengal.

Copy forwarded for information and necessary action to the:-

1. Director of Health Services & e.o Secretary, Government of West Bengal.
2. Managing Director, West Bengal Medical Service Corporation Limited.
3. District Magistrate, Bankura.
4. General Manager, West Bengal Medical Service Corporation Limited. One Copy of estimate is enclosed herewith for ready reference.
5. Chief Medical Officer of Health, Bishnupur Health District.
6. Manager (Accounts), West Bengal Medical Service Corporation Limited.
7. Senior Accounts Officer, National Health Mission.
8. Dr. B. Roy, Co-ordinating Officer, FBNC Cell.
9. Superintendent, Bishnupur District Hospital, Bishnupur Health District.
10. District Programme Co-ordinator, DPMU, Bishnupur Health District.
11. Sub-Assistant Engineer, DPMU, Bishnupur Health District.
12. Deepak Debnath, SPMU, National Health Mission.
13. Copy for the Guard File
14. Office Copy.

  
Programme Officer, NHM  
& Deputy Secretary to the  
Government of West Bengal.

Receipt No : 318970/2018/NHM SEC(H&FW)

Estimate for the work of " Construction of a shed/roof truss at the Roof of SNCU for drying the washed ilen of SNCU building of Bishnupur District Hospital" under Bishnupur Sub-Division , PWD during the year 2017-18: 2018-19												
Sl.	Ref. Page/SI	Description of items	No.	Length	Breadth	Hight	Unit	Quantity	Mar- ked	Total	Rate	Amount
1	100/2	<p>M.S. structural works in roof trusses with tubular sections conforming to IS: 806-1968 &amp; IS: 1161- 1998 connected to one another with bracket, gusset cleats as per design, direction of Engineer-in-charge complete including cutting to requisite size, fabrication with necessary metal arc welding conforming to IS: 816-1969 &amp; IS: 9595 using electrodes of approved make and brand conforming to IS:814- 2004, haulage, hoisting and erection all complete. The rate includes the cost of rolled steel section, consumables such as electrodes, gas and hire charge of all tools and plants and labour required for the work including all incidental chages such as electricity charges, labour insurance charges etc. Payment to be made on the basis of calculated weight of structural tubular memebre as specified in relevent IS code in finished work. i) For trusses showing upto 12.00 m Diagram for gusset bracket cleat may be added by adding the</p> 										
		6.00 Mir X12.00 Mtr	2	3.76	=	7.520	✓					
		Length of the Truss Single Unit	1	6.00	=	6.000	✓					

Receipt No : 318970/2018/NHM SEC(H&FW)

Sl.	Ref. Page/Sl	Description of Items	No.	Length	Breadth	Hight	Unit	Quantity	Mar- ked	Total	Rate	Amount
			1	1.00	=	1.000						
			2	0.67	=	1.340						
			2	1.20	=	2.400						
					Total =	18.260						
		With 80 x 80 x 8mm (SHS) Square Steel Hollow Section (17.80 Kg/m)	6	18.26	@	17.800	Kg	1950.168				
		Truss Spacing @ 2.50 mtr C/C	4	12.00	@	17.800	Kg	854.4				
		Tie @ 2.00 Mtr C/C										
		50 x 50 x 5mm (SHS) Square Steel Hollow Section (6.97 Kg/m)	16	12.00	@	6.970	Kg	1338.24				
		Purlins @ 600 C/C	12	3.76	@	6.970	Kg	314.486				
		Batten @ 750 C/C	2	12.00	@	6.970	Kg	167.28				
		For Vertical Sheeting	2	6.00	@	6.970	Kg	83.64				
		150 x 150 x 16mm (SHS) Square Steel Hollow Section (66.40 Kg/m)	18	2.70	@	66.400	Kg	3227.04		7.935	57468.00	471827.00
2	87/14	Column Supplying, fitting & fixing Zn-Al alloy (55% Al & 45% Zn) coating of 150 grams per sq. metre (followed by colour coated on both side) steel sheet work having minimum yield strength of 550 Mpa of trapizoidal profile of approved make (excluding the supporting frame work) fitted and fixed with 55 mm & 25 mm self tapping screw, EPDM Washer 16 mm dia & 3 mm th. washer etc. complete with 150 mm end lap and one corrugation minimum side lap. (Payment to be made on area of finished work).								m <sup>2</sup>		
		(i) In Roof:-										



Sl.	Ref. Page/Sl	Description of Items	No.	Length	Breadth	Hight	Unit	Quantity	Marked	Total	Rate	Amount
		a) With 0.5 mm thick sheet In Roof	2	3.76	12.00		Sqm	90.24				
		Walling	2	12.00	0.90		Sqm	21.6				
			2	6.00	0.90		Sqm	10.8		122.640	896.00	109885.00
3	10/1	Dismantling all types of masonry excepting cement concrete plain or reinforced, stacking serviceable materials at site and removing rubbish as directed within a lead of 75 m. Existing Parapit	1	12.00	1.000	0.250	Cum	3.00				
		<del>General floor.</del>	1	6.00	1.000	0.250	Cum	1.50		4.50	447.00	2012.00
15	/8	Brick work with 1st class bricks in cement mortar (1:6)										
		(b) In superstructure, Second Floor										
		Qty Same as above										
4	26/10	Ordinary Cement concrete (mix 1:1.5:3) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement if any, in ground floor as per relevant IS codes.										
		(i) Pakur Variety										
		For Base	3	12.00	0.30	0.400	Cum	4.32				
5	42/36	Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (a) 25 mm to 30 mm thick wooden shuttering as per decision & direction of										
		Base Side	6	12.00	0.40		Sqm	28.8		28.80	321.00	9245.00

8

Sl.	Ref. Page/Sl	Description of Items	No.	Length	Breath	Hight	Unit	Quantity	Mar- ked	Total	Rate	Amount
6	43/40	Reinforcement for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc initial										
		2% Of Concrete										
7	189/01	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course. (i) With 1:4 cement mortar (b) 15 mm thick plaster For Parapit Wall	1	12.00	1.250		Sqm	15.000				
		For Base Conc	1	6.00	1.250		Sqm	7.500				
			6	12.00	0.40		Sqm	28.800				
			3	12.000	0.30		Sqm	10.800				
8	200/01	(a) Priming one coat on steel or other metal surface with synthetic oil bound primer of approved quality including smoothing surfaces										
		Steel Truss										
		With 80 x 80 x 8mm (SHS) Square Steel Hollow Section (17.80 Kg/m)										
		Truss Spacing @ 2.50 mtr C/C	6	18.26	0.320		Sqm	35.0590				
		Tie @ 2.00 Mtr C/C	4	12.00	0.320		Sqm	15.3600				
		50 x 50 x 5mm (SHS) Square Steel Hollow Section (6.97 Kg/m)										
		Purlins @ 600 C/C	16	12.00	0.200		Sqm	38.4000				
		Batten @ 750 C/C	12	3.76	0.200		Sqm	9.0240				
		For Vertical Sheeting	2	12.00	0.200		Sqm	4.8000				
			2	6.00	0.200		Sqm	2.4000				

Sl.	Ref. Page/Sl	Description of Items	No.	Length	Bredth	Hight	Unit	Quantity	Mar- ked	Total	Rate	Amount
		150 x 150 x 16mm (SHS) Square Steel Hollow Section (66.40 Kg/m)										
		Column	18	2.70	0.600		Sqm	29.1600		134.203	29.00	3892.00
9	200/02	(A) Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc.										
		(b) On steel or other metal surface :										
		With super gloss (hi-gloss)										
		(ii) Two coats (white in shade)										
		Qty Same as above					Sqm	134.203		134.2030	77.00	10334.00
10	196 172/18 8	Applying Exterior grade Acrylic primer of approved quality and brand on plastered or concrete surface old or new surface to (iii) Two coats.										
		Parapit Wall	4	16.000	1.000		Sqm	64.000			45.00	4420.00
			4	8.500	1.000		Sqm	34.000		98.00	48.00	4801.00
11	197 173/18 17	Protective and Decorative Acrylic exterior emulsion paint of approved quality, as per manufacturer's specification and as per										
		a) Normal Acrylic Emulsion									67.00	6566.00
		At G.F.	Qty same as sl -21				Sqm	98.00		98.00	73	7154.00

708096.86 Total Rs. 734784.00  
 84971.62  
 Add GST @ 12% of above =Rs. 88174.00

A. Cost of Work excluding labour welfare cess 622058.00  
 =Rs 793068.48  
 Add @ 1% for labour welfare cess =Rs 8230.00  
 (+) 7930.68 7971.68  
 Cost including Labour welfare Cess 831188.00  
 822999.16 831188.00  
 Contingency Charge @ 3% is to be considered on A. 24935.64  
 856877.00

*23.04*  
 Superintendent  
 Bishnupur District Hospital, Bankura  
 25/04/18  
 Medical Officer Of Health  
 Bishnupur Health District  
 Bishnupur Bankura  
 29.9.18  
 Junior Engineer  
 Bishnupur West Section  
 Bishnupur Sub-Division (P.W.D.)

*Basob Das*  
 6/9/18  
 Assistant Engineer PWD  
 Bishnupur Sub-Divn.

Checked  
 24/07/18  
 Assistant Engineer (Civil)  
 West Bengal Medical Services Corporation Ltd.

*Prad*  
 24/7/18  
 Consultant Project Eng. (Civil)  
 West Bengal Medical Services Corporation Ltd.

*18/04/18*  
 Executive Engineer  
 Bishnupur Division  
 P.W. Dept.  
 Add administrative charge @ 4% (+) 31722.74  
 Add GST @ 18% of 4% management fees (+) 5710.09  
 Rs 838432.00